

HMI Lot Site Improvements

Landscape Plan

September 2023



PLANT SCHEDULE

TREES	CODE	BOTANICAL / COMMON NAME	SIZE	CONTAINER	QTY
	CK	Cladrastis kentuckea / American Yellowwood	2" Cal.	B&B	1
	CW	Cornus florida 'Appalachian Joy' / Appalachian Joy Dogwood	1.5" Cal.	B&B	4
	CC	Cornus florida 'Cherokee Brave' / Cherokee Brave Dogwood	1.5" Cal.	B&B	2
	GS	Gleditsia triacanthos inermis 'Shademaster' / Shademaster Honey Locust	3" Cal.	B&B	5
	NH	Nyssa sylvatica 'Haymanred' / Red Rage® Tupelo	2" Cal.	B&B	2
	OV	Ostrya virginiana / American Hophornbeam	2" Cal.	B&B	1
	QA	Quercus acutissima / Sawtooth Oak	2" Cal.	B&B	2
	TI	Thuja x 'Green Giant' / Green Giant Arborvitae	2" Cal.	B&B	6
	UF	Ulmus carpinifolia x parvifolia 'Frontier' / Frontier Elm	2" Cal.	B&B	3
SHRUBS	CODE	BOTANICAL / COMMON NAME	SIZE	CONTAINER	QTY
	CK2	Calamagrostis x acutiflora 'Karl Foerster' / Karl Foerster Feather Reed Grass	3 gal.	Pot	32
	RG2	Rhus aromatica 'Gro-Low' / Gro-Low Fragrant Sumac	3 gal.	Pot	96
	RR	Rosa rugosa / Rugosa Rose	3 gal.	Pot	40
	VS	Viburnum dentatum 'Synnestevedt' / Chicago Lustre® Arrowwood Viburnum	5 gal.	Pot	6

* CITY STAFF TO CONFIRM PROPOSED TREE LOCATIONS PRIOR TO PLANTING
* CONTRACTOR TO INCLUDE A \$5,000 ALLOWANCE FOR TREE TRIMMING & REMOVAL



SCALE: 1" = 20'-0"

LANDSCAPE PLAN

HMI Lot Site Improvements




Landscape Plan

September 2023




bdc bookerdesign
collaborative
954 E. Kentucky Street, Suite 1 Louisville, Ky 40204

LEGEND

-  LAWN MOWN ZONE : 9,307 SF.
-  LAWN INTERMITTENT MOWN ZONE : 14,995 SF.
-  ROUNDSTONE NATIVE SEED COMPANY MIX NS-D1
NORTHERN POLLINATOR CONSERVATION MIX (9 IBS/ACRE) & ROUNDSTONE
NATIVE SEED COMPANY BROWN MILLET COVER CROP (5 IBS/ACRE): 5,810 SF.

*REFER TO SPECIFICATIONS FOR CLEARING & SITE PREPARATION PRIOR TO SEEDING
*REFER TO SPECIFICATIONS FOR PLANTING SEEDS & TIMING OF SEED PLANTING

POLLINATOR/MOW ZONE PLAN

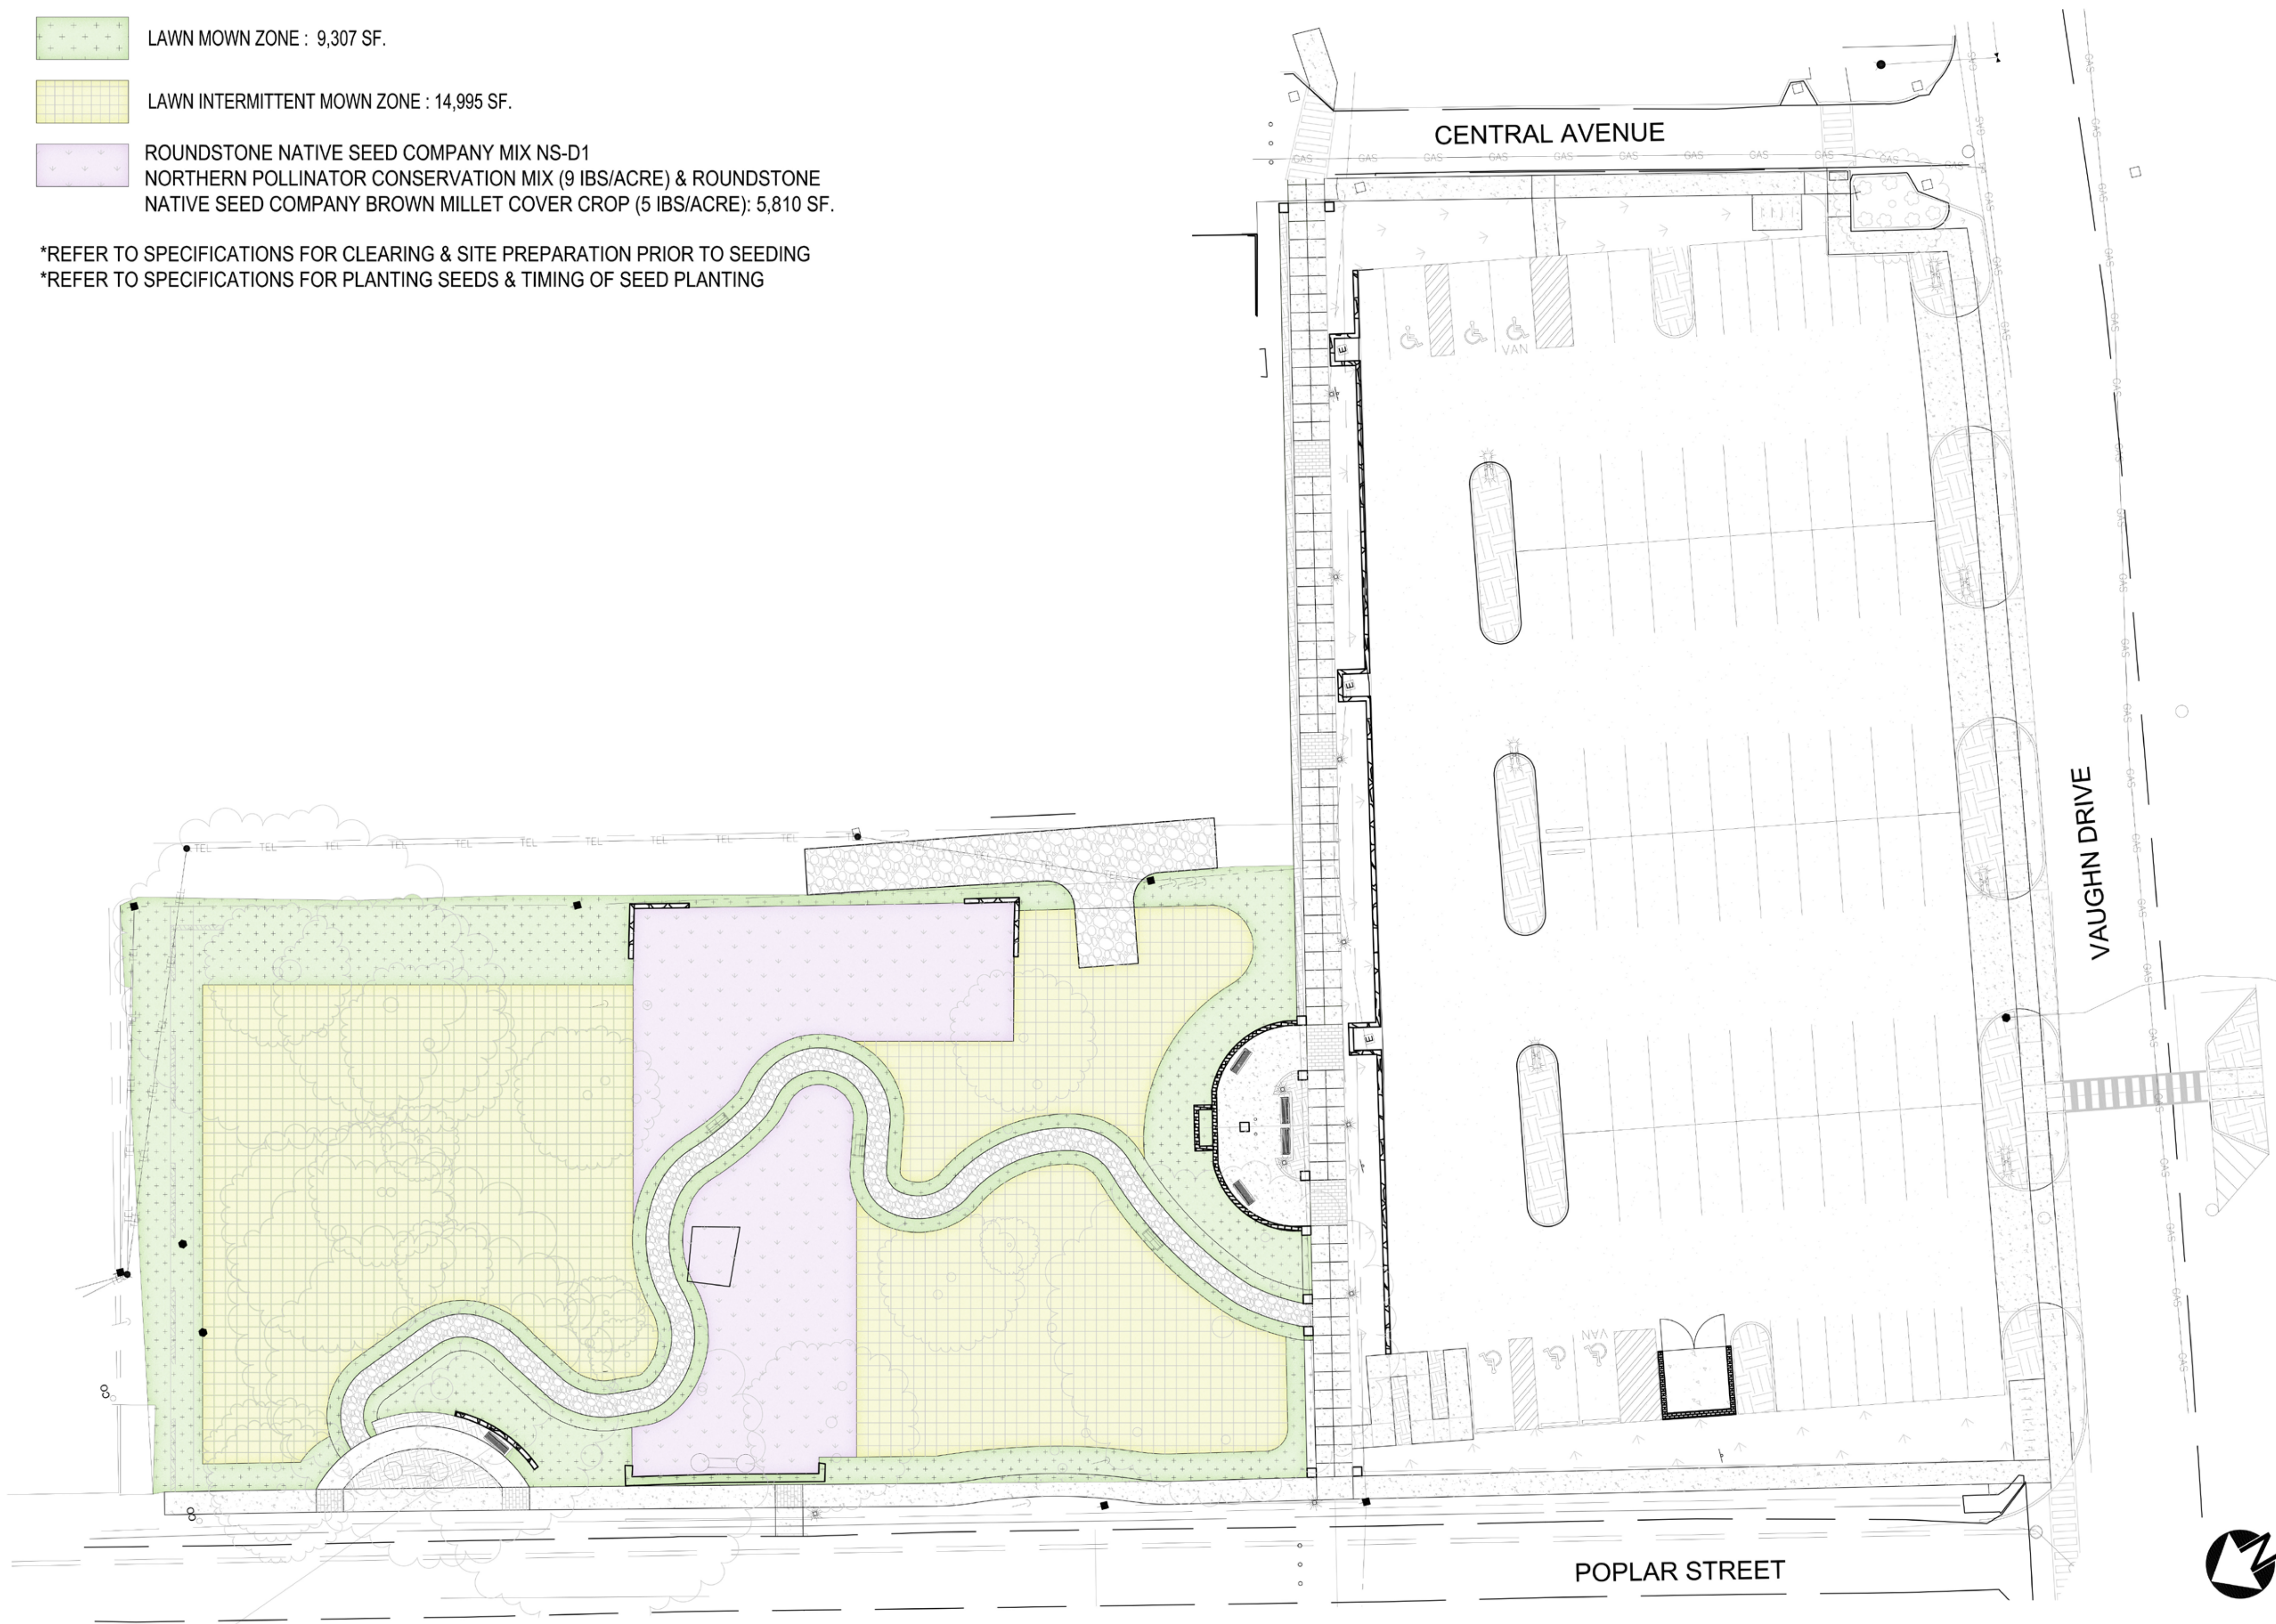

SCALE: 1" = 20'-0"